




2019 Bathurst 12 Hour Tyre Information

The static measurements are provided for the specific tyre-rim combinations

Geometric measurements are taken with the tyre fitted on the rim and inflated to 2.0bar / 29.0psi

Circumference (πD) (mm)	length along the middle tread line of the tyre
Max Width (C) (mm)	maximum width of the tyre
Tread Width (Cb) (mm)	width of the tread

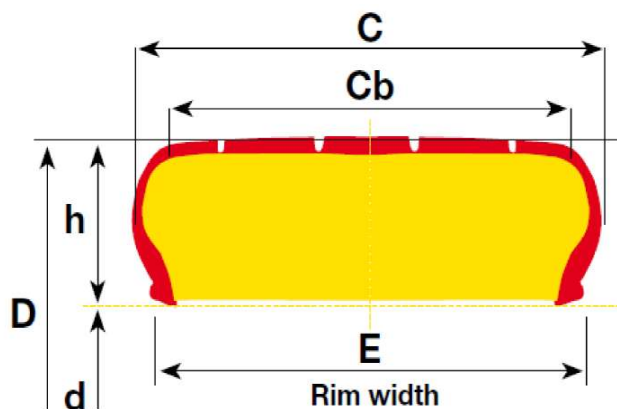

Size	Compound Dry	Compound Wet	Price AUD	Max Width (C) (mm)	Circumference (πD) (mm)	Tread Width (Cb) (mm)	Rim (inch)
245/645-18	DH	WH	\$750	240	2040	240	18" x 8J
265/645-18	DH	WH	\$774	268	2045	260	18" x 9.5J
275/645-18	DH	WH	\$780	282	2040	280	18" x 10J
285/645-18	DH	WH	\$796	300	2037	280	18" x 11J
305/645-18	DH	WH	\$820	307	2032	295	18" x 11J
305/660-18	DH	WH	\$855	302	2080	280	18" x 11J
305/680-18	DH	WH	\$870	305	2148	280	18" x 11J
315/680-18	DH	WH	\$878	327	2155	295	18" x 12J
325/660-18	DHD2	WH	\$882	331	2077	295	18" x 12J
325/680-18	DHD2	WH	\$886	334	2155	300	18" x 12J
325/680-18	DHD2	WH	\$886	340	2155	300	18" x 12.5J
325/705-18	DHD2	WH	\$895	354	2218	310	18" x 13J
325/705-19	DHC	WH	\$996	351	2218	315	18" x 13J

For Tyres Orders and further information please contact:

Pirelli Tyres Australia

simon.pool@pirelli.com

+61 416 222 136

www.pirelli.com/tyres/en-ww/motorsport/tyres-catalogue